

Induction Ring Steamer



INDUCTION RING & ROLLRICE STEAMER

- High quality stainless steel #304, hairline finish body construction with solid top 1.5mm thickness.
- Powerful performance, high energy efficiency & quiet operation
- No open flame, no gas emission, reduces environmental pollution
- Electromagnetic heating up, thermal efficiency is over 90%.
- Microcomputer temperature control system
- User friendly & easy for cleaning and no intensive maintenance required.
- Patented copper coil for powerful and uniform heat for better cooking.
- Over/under voltage/current protection
- Over heat and dry burning protection
- Soft start technology, automatic alarm device for safety operation.
- Waterproof display, anti-oil, water and, insect erosion design.



- Ultra-long life magnetic sensor switch and PCB board for precise performance.
- IPX4 protection level with multiple protection

CONSTRUCTION & FEATURES

DIMSUM STEAMER SERIES 750MM			Combined 1 Dimsum & 1 Roll Rice Steamer	
	Model	TIA-S90DS1		TIA-S90DS2
	Dimension (mm)	800 x 900 x 1200H		1600 x 900 x 1200H
	Power (kW)	1 x 20 kW (25kW optional)		2 x 20 kW (25kW optional)
Voltage	380V/50Hz,3P	380V/50Hz,3P		
ROLL RICE STEAMER SERIES 900MM				
	Model	TIA-S90RS1	TIA-S90RS2	TIA-S90DRS2
	Dimension (mm)	800 x 900 x 1200H	1000 x 900 x 1200H	1600 x 900 x 1200H
	Power (kW)	1 x 12 kW (15kW optional)	2 x 12 kW (15kW optional)	1 x 20 kW + 1 x 12kW
Voltage	380V/50Hz,3P	380V/50Hz,3P	380V/50Hz,3P	


SPECIFICATIONS



m: +65-9038-0875
 e: sales@trutech.sg
 w: www.trutech.sg

TRUTECH PTE. LTD
 470 North Bridge Road, #5-12 Bugis Cube,
 Singapore (188735)

Induction Ring Steamer

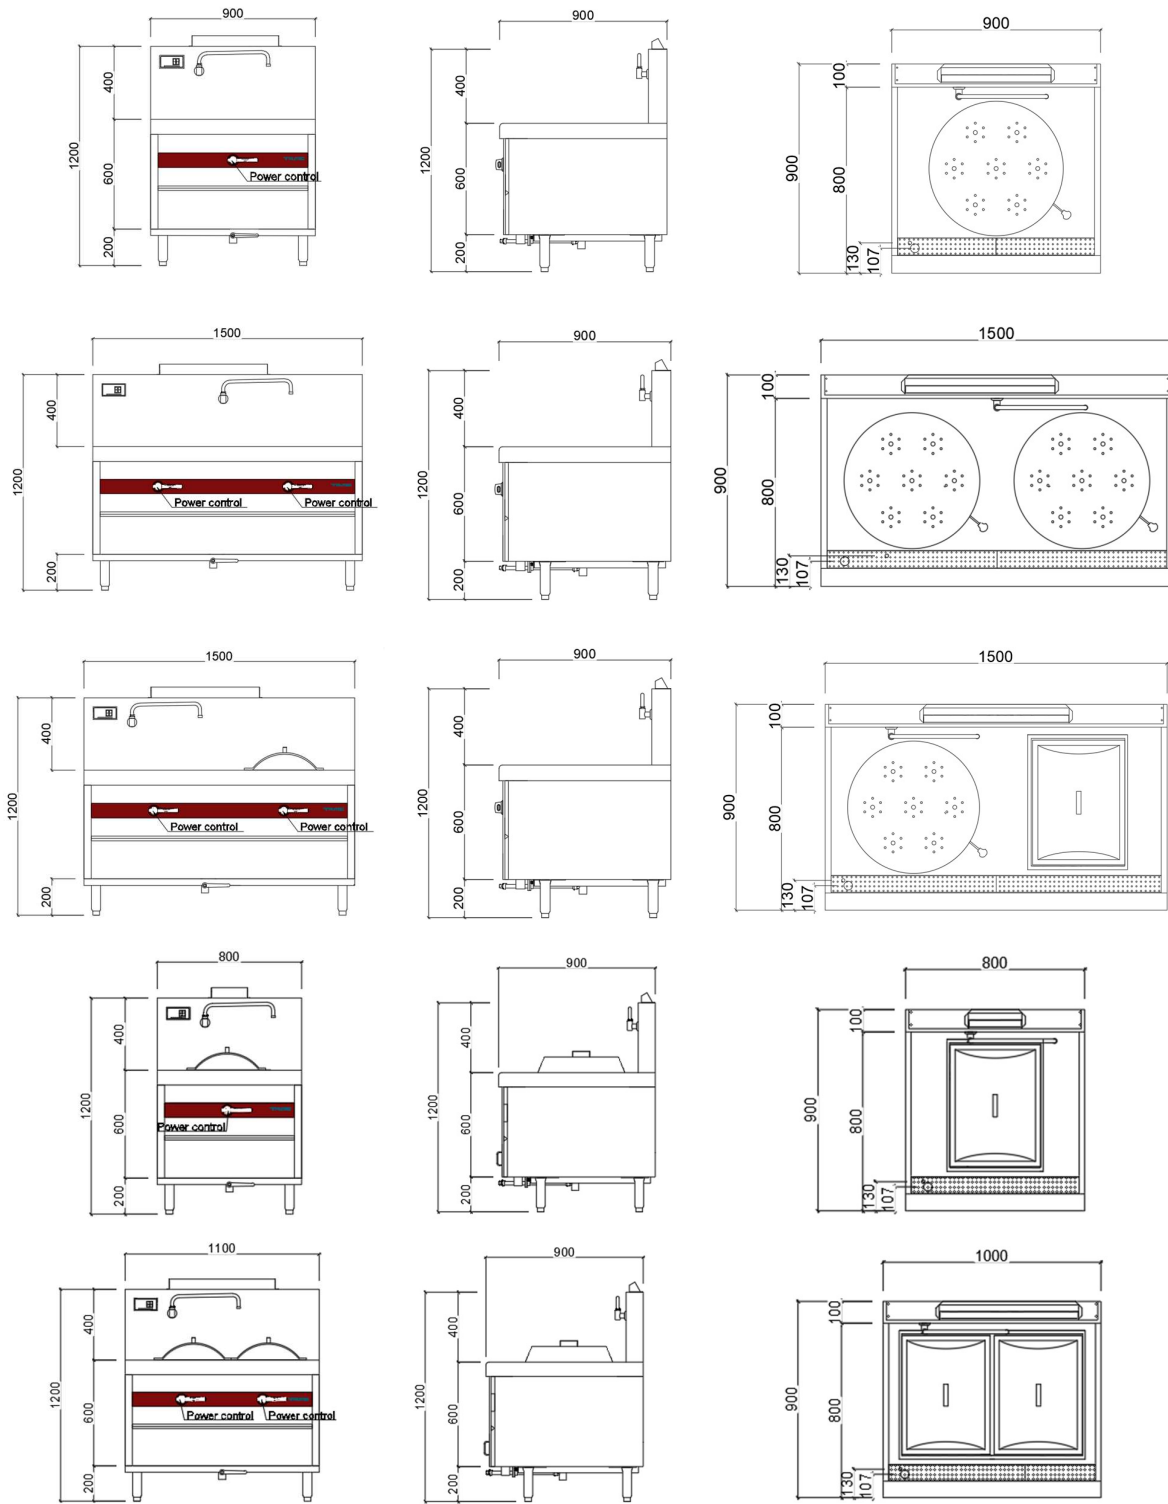

TECHNICAL DRAWINGS



m: +65-9038-0875
e: sales@trutec.sg
w: www.trutec.sg

TRUTEK PTE. LTD
470 North Bridge Road, #5-12 Bugis Cube,
Singapore (188735)