




Mobile Refrigerated Banquet Carts

CONSTRUCTION & FEATURES

- #304 Stainless steel interior & exterior.
- Bottom-mounted high ambient 43°C refrigeration system.
- Ultra low energy consumption.
- Zero ODP injected polyurethane insulation for environmental protection.
- Factory preset refrigerator temperature at -2/ +4°C.
- Electronic controller with a large display.
- Audio visual temperature alarms come as standard, along with HACCP capability.
- Automatic defrost to help minimizing service needs.
- Coated evaporator and vaporizer coil.
- Safety cut out switch - heated.
- Interior curved corners/edges for easy cleaning and hygiene & sanitation purpose.
- Gastro norm shelving system with anti-tilt slides.
- Two (2) integrated flush door handles on each side of the cart for easy transportation.
- Lockable self-closing door.
- Four (4) heavy-duty swivel castors- two (2) with brake.
- Full-perimeter bumper guard to ensure heavy duty use and protection.



SPECIFICATIONS



Item Name	Refrigerated Cart	Refrigerated Cart	Refrigerated Cart
Model	TRMB10	TRMB16	TRMB32
Temperature (°C)	+2/+4°C	+2/+4°C	+2/+4°C
Dimension	840 x 915 x 1540mmH	840 x 915 x 1990mmH	1505 x 915 x 1990mmH
Power (W)	600W	680W	770W
Voltage	220V/50Hz/1PH	220V/50Hz/1PH	220V/50Hz/1PH
Capacity (L)	378	526	1110
Refrigerant	R134a	R134a	R134a
Shelves / GN Tray 2/1	10	16	32
Defrost	Off cycle	Off cycle	Off cycle

Mobile Banquet Cart

HIGHLIGHTS



HIGH QUALITY STAINLESS STEEL
High quality stainless steel guarantees good-looking, durability, hygiene and corrosion resistance over time.



INTELLIGENT DEFROST
Intelligent defrost changes according to the actual presence of frost. The system runs for the minimum time required.



CONSTANT TEMPERATURE
The fans stop when the door is opened to reduce temperature changes and consequently reduce the work of the compressor.



INSULATION THICKNESS
The 50mm thick insulation ensures lower heat loss, reduces work of the compressor, therefore lower energy consumption.












EVAPORATION SYSTEM
The automatic evaporation of condensing water is activated only in the presence of water produced as a result of a defrost cycle.



TROPICALIZED CDU
Tropicalized low-noise compressor for powerful operation in hi-temp ambient environment. Stable and durable.

TECHNICAL DRAWINGS



Mobile Food Warmer Cart

CONSTRUCTION & FEATURES

- SS#304 Stainless steel interior & exterior.
- Ultra low energy consumption.
- Zero ODP injected polyurethane insulation for environmental protection.
- Preset temperature to operate between 35°C and 82°C.
- Electronic controller with clear display.
- Audio visual temperature alarms come as standard, along with HACCP capability.
- Safety cut out switch - heated.
- Clear indicated color-coded control panel.
- Interior curved corners/edges for easy cleaning and hygiene & sanitation purposes.
- Gastronorm shelving system with anti-tilt slides.
- Mechanical parts are easily accessible for quick servicing maintenance.
- Two (2) integrated flush door handles on each side of the cart for easy transportation.
- Lockable self-closing door.
- Four (4) heavy-duty swivel castors- two (2) with brake.
- Bumper guard to ensure heavy duty use & protection.



SPECIFICATIONS



Item Name	Mobile Food Warmer Cart	Mobile Food Warmer Cart
Model	THPW-4	THPW-8
Shelves	4	8
Temperature (°C)	+30/+82°C	+30/+82°C
Dimension (WxDxH)	750 x 750 x 1000mmH	1020 x 660 x 880mmH
Power (W)	780W	1.2KW
Voltage	220V/1Ph/50Hz	220V/1Ph/50Hz


Mobile Hot Banquet Carts

CONSTRUCTION & FEATURES

- SS#304 Stainless steel interior & exterior.
- Ultra low energy consumption.
- Zero ODP injected polyurethane insulation for environmental protection.
- Preset temperature to operate between 78°C and 82°C.
- Electronic controller with a large LCD display.
- Audio visual temperature alarms come as standard, along with HACCP capability.
- Safety cut out switch - heated.
- Clear indicated color-coded control panel.
- Interior curved corners/edges for easy cleaning and hygiene & sanitation purposes.
- Gastronorm shelving system with anti-tilt slides.
- Mechanical parts are easily accessible for quick servicing maintenance.
- Two (2) integrated flush door handles on each side of the cart for easy transportation.
- Lockable self-closing door.
- Four (4) heavy-duty swivel castors- two (2) with brake.
- Bumper guard to ensure heavy duty use & protection.



SPECIFICATIONS

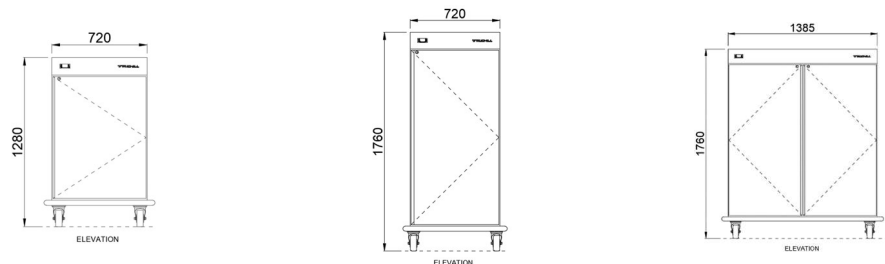

Item Name	Hot Banquet Cart	Hot Banquet Cart	Hot Banquet Cart
Model	THMB10	THMB16	THMB32
Temperature (°C)	+78/+82°C	+78/+82°C	+78/+82°C
Dimension	840 x 915 x 1540mmH	840 x 915 x 1990mmH	1505 x 915 x 1990mmH
Power (W)	780W	1.2KW	1.6kW
Voltage	220V/1Ph/50Hz	220V/1Ph/50Hz	220V/1Ph/50Hz
Capacity (L)	378	526	1110
Shelves / GN Tray 2/1	10	16	32
Defrost	Off cycle	Off cycle	Off cycle